




TOP VIEW

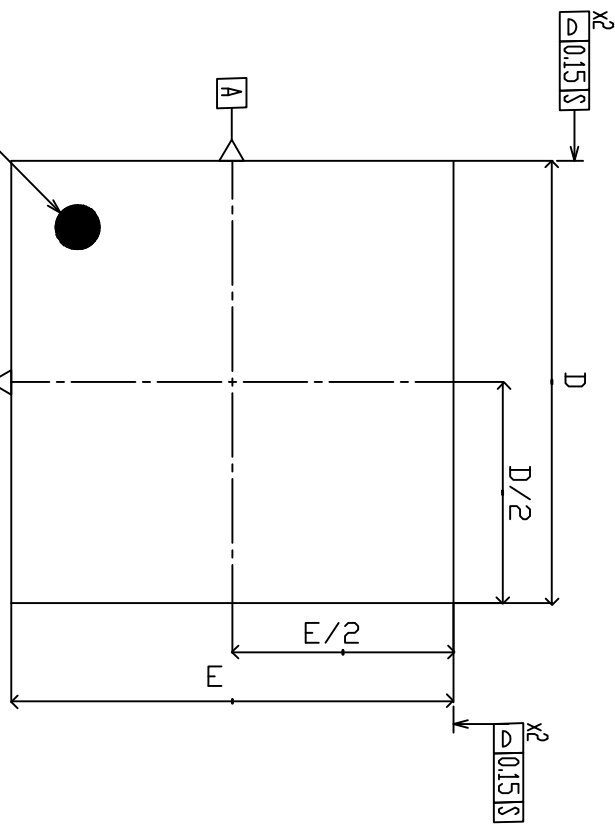


#1 Pin Indicator With Laser Mark

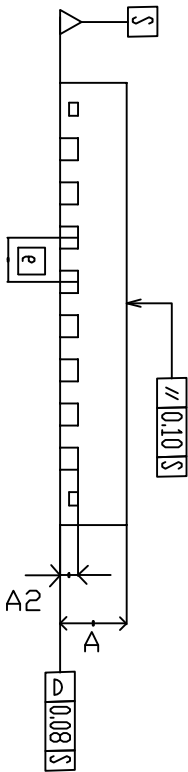

BOTTOM VIEW

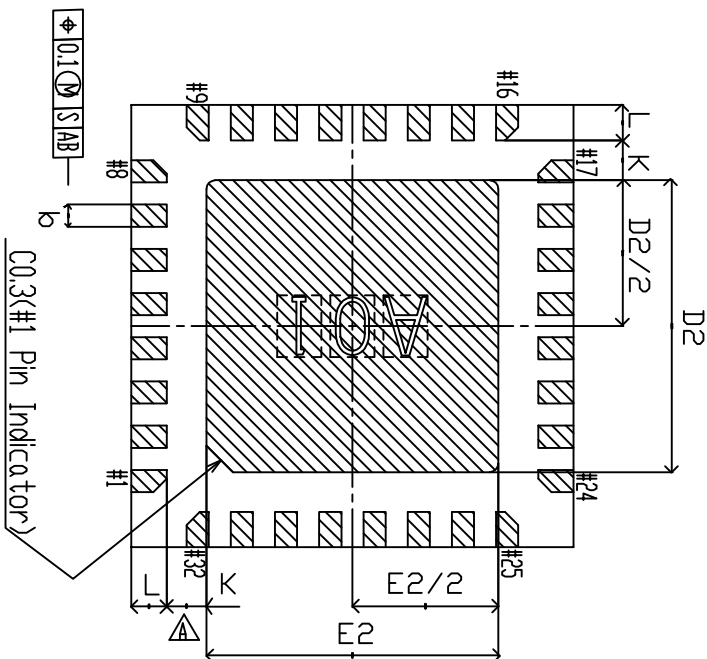

*TRACE CODE: BOTTOM SIDE HALF ETCHING(DEPTH:0.1REF.)



- ① :A,B,...(FRAME ROW)
- ②③ :01,02,...36(FRAME COLUMN)



TITLE:
POD for 32LD QFN(5X5)MM,
0.50MM PITCH_MHT

DATE:

09/02/08

DOCUMENT NO.

REV. A

SL/POD-00036

Page 1 of 3

SYMBOL	COMMON DIMENSIONS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A2	0.20 REF.		
b	0.20	0.25	0.30
D	4.90	5.00	5.10
D2	3.15	3.30	3.45
E	4.90	5.00	5.10
E2	3.15	3.30	3.45
e	0.50 BSC.		
k	0.41	—	—
L	0.30	0.40	0.50

NOTES)
1. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
2. DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED ± 0.10 .
3. THE SURFACE OF THE PACKAGE SHALL BE RZ 4-8 μ m.
4. PROTRUSIONS AT PKG. OUTLINE SHALL NOT EXCEED 0.10.



SPECTRALINEAR INC.
2200 LAMBERTWOOD RD.
SANTA CLARA, CA
95054
TEL: 408-855-0555
FAX: 408-855-0550

TITLE:
POD for 32LD QFN(5X5)MM,
0.50MM PITCH_MHT

DATE:

09/02/08

DOCUMENT NO.

REV. A

SL/POD-00036

Page 2 of 3



Document History Page

Document Title: POD for 32LD QFN(5X5)MM, 0.50MM PITCH_MHT

Document Number: SL/POD-00036 Rev. A

Rev.	ECR No.	Date	Orig. of Change	Description of Change
A	ECR-745	9/2/2008	RP	NEW RELEASE